


POLYETHYLENE COMMUNICATIONS- ELECTRICAL CONDUIT

www.pca.net.au



Manufactured to: AS4130 or AS1159
 Straight lengths in crates
 Free standing coils
 25-110mm - HDPE
 HDPE BLACK or WHITE

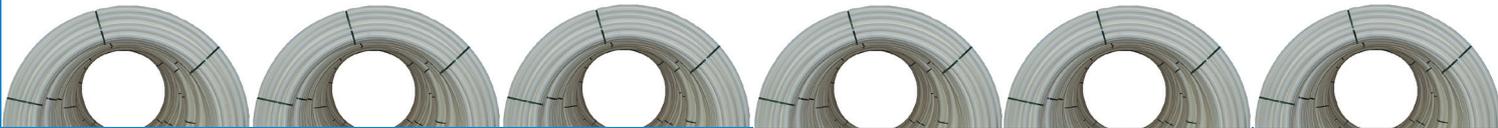

STANDARD CONFIGURATIONS

Nom OD	Outside Diameter		Class 6			Class 9		
			Wall Thickness		WEIGHT	Wall Thickness		WEIGHT
	Min	Max	Max	Min	Kg/m	Min	Max	Kg/m
25	25.0	25.3	N/A	N/A	N/A	2.3	2.6	0.199
32	32.0	32.3	1.9	2.2	0.185	2.7	3.1	0.256
40	40.0	40.4	2.3	2.7	0.285	3.4	3.9	0.403
50	50.0	50.5	2.9	3.3	0.441	4.2	4.8	0.621
63	63.0	63.6	3.6	4.1	0.69	5.3	6.0	0.982
75	75.0	75.7	4.3	4.9	0.981	6.3	7.1	1.387
90	90.0	90.9	5.2	5.9	1.421	7.5	8.4	1.978
110	110.0	111.0	6.3	7.1	2.098	9.2	10.3	2.963



Nom OD	Outside Diameter		SDR 13.6		
			Wall Thickness		WEIGHT
	Min	Max	Max	Min	Kg/m
25	25.0	25.3	1.9	2.2	0.144
32	32.0	32.3	2.4	2.8	0.233
40	40.0	40.4	3.0	3.4	0.36
50	50.0	50.5	3.7	4.2	0.556
63	63.0	63.6	4.7	5.3	0.886
75	75.0	75.7	5.5	6.2	1.235
90	90.0	90.9	6.6	7.4	1.775
110	110.0	111.0	8.1	9.1	2.662

sales@pca.net.au

PIPECOUPLINGS(A/SIA)PTYLTD

AUSTRALIA • 8 Hilly Street, Mortlake - NSW 2137 - SYDNEY - AUSTRALIA - tel: +61 (0)2 97436566 - fax: +61 (0)2 9743 6564

